

pure LIGHTING
EXCITEMENT



NEW PRODUCTS 2014/15

CLUB & INSTALL

PRODUCTION & EVENT


BAND & STAGE

DJ LIGHTING

3 SIXTY 2R™

- Light Source: 2x Philips® Platinum 2R discharge, 8,000° K - 6,000 hr. lamp life
- LUX: 50460 @10M
- Operational modes: DMX, Auto Run, Master/Slave & Sound Active
- DMX channels: 21, 24 or 32; 3 Pin with Remote DMX addressing
- Colors: 13 Colors + White (Each Head) & Gobos: 14 rotating fixed gobos + spot (Each Head)
- Features: 4° Beam angle adjustable via reducing beam gobos, 8 Facet Prisms, Frost Filters, Infinite Pan and Tilt
- Pan: Standard 360/540 degree, Tilt: 270 degree; or optional Infinite Pan and Tilt
- Power Draw: 400W Max; 3.3 Amps @120V, 1.81 Amps@220V
- Multi-voltage Operation: 100-240V, 50Hz/60Hz (auto sensing), Powercon In
- Dimensions (LxWxH): 17"x13"x18.75" / 428x326x473mm
- Weight: 45 lbs. / 20.3 kg.

Photometric



Product Video




Code: 1237000086

ILLUSION DOTZ 4.4™

- Light Source: 16 X 30W RGB COB LEDs, 100,000 Lamp life - Beam Angle: 15 degrees
- Operational modes: DMX, Master/Slave Mode, Auto Mode & Sound Active
- DMX channels: 12, 14, or 59; 3 & 5 Pin In/Out
- Moving Head with 4X4 Matrix of Pixel controllable Tri color LEDs
- RJ45 Input/Output for Artnet/KlingNet Control
- Powercon AC In/OUT; Daisy Chain up to 3 units @120V, 5 units @ 220V
- Power Draw: 468W Max; 3.9 Amps @120V, 2.13 Amps@220V
- Multi-voltage Operation: 100-240V, 50Hz/60Hz (auto sensing)
- Dimensions (LxWxH): 16.5" x 6" x 15" / 414 x 153 x 376mm
- Weight: 18 lbs. / 7.8 kg.

Photometric



Product Video




Code: 1237000083

CRAZY 8™

- Light Source: 8 X 8W High Powered White LEDs, 50,000 Lamp life
- Operational modes: DMX, Master/Slave Mode & Sound Active
- DMX channels: 1,9,12,15, or 21; 3 Pin In/Out
- Moving Head with dual tilting bars, create 8 sharp 4.5 degree beams
- Base Pans 540 degree, each bar Tilts 150 degrees
- Electronic Strobe/Random effect; Individual Pixel Control
- Powercon AC In/OUT; Daisy Chain up to 4 units @120V, 8 units @ 220V
- Power Draw: 90W Max; .75 Amps @120V, .41 Amps@220V
- Multi-voltage Operation: 100-240V, 50Hz/60Hz (auto sensing)
- Compatible with ADJ UC3 series remotes
- Dimensions (LxWxH): 16.5" x 6" x 15" / 414 x 153 x 376mm
- Weight: 18 lbs. / 7.8 kg.

Photometric



Product Video




Code: 1237000087

INNO SPOT ELITE™

- High output Intelligent Moving Head with a bright white LED source
- 8 Colors + Spot | 7 rotating, replaceable gobos + spot
- 6 Glass and 1 Metal Gobo | Separate color & gobo wheels | 19-degree beam angle
- 3 Operational modes: DMX-512, Sound Active or Show Mode | 15 DMX channels
- Gobo scroll mode | Motorized focus & Iris
- 4-button DMX LCD display | 4 Built-In show modes
- Gobo Shake effect | 6-facet rotating prism effect
- Linkable: DMX via 3-pin XLR cable; Power via IEC daisy-chain power link (Up to 4 Inno Spot Elite's @ 120V, 8 Inno Spot Elite's @ 220V fixtures)
- LED Source: 180W White LED source, 8000K (Rated at approximately 50,000 hrs)
- Lux @ 3M: 4840 Lux
- Dimensions (LxWxH): 333 x 328 x 526mm
- Weight: 13 kg

Photometric




Code: 1222400083

INNO SPOT PRO & PEARL™

- Light Source: 80W High Output White LED (8000K Color temperature)
- LUX: 4840 @3M
- Operational modes: DMX, Auto Run, Master/Slave & Sound Active
- DMX channels: 14; 3 Pin In/Out
- Colors: 8 Colors + Open
- Gobos: 6 Rotating, Interchangeable Gobos + spot, 24mm (20mm viewable; metal/glass)
- Features: 12-17° Beam angle (manual zoom), Motorized Focus, 3 Facet Prism, Glass Gobos
- Pan: 540 degree, Tilt: 270 degree
- Power Draw: 140W Max; 1.16 Amps @120V, .64 Amps@220V
- Multi-voltage Operation: 100-240V, 50Hz/60Hz (auto sensing)
- Dimensions (LxWxH): 11.5" x 6.75" x 16.75" / 288 x 167 x 425mm
- Weight: 19.8 lbs. / 9 kg.

Photometric



INNO SPOT PRO Code: 1222400082
INNO SPOT PRO PEARL Code: 1222400086

INNO POCKET SPOT & PEARL™

- Light Source: 12W CREE High Output White LED, 50,000 Lamp life
- LUX: 4823 @ 2M at 13° beam angle
- Operational modes: DMX, Auto Run, Master/Slave & Sound Active
- DMX channels: 9 or 11; 3 Pin In/Out
- Colors: 7 Colors + Open
- Gobos: 7 Fixed Gobos + spot
- Features: Built in Shows, included IR remote control (UC-IR)
- Pan: 540 degree, Tilt: 230 degree
- Power Draw: 53W Max; .44 Amps @120V, .21 Amps@220V
- Multi-voltage Operation: 100-240V, 50Hz/60Hz (auto sensing)
- Dimensions (LxWxH): 6.26" x 5.79" x 10.43" / 159 x 147 x 265mm
- Weight: 6 lbs. / 2.7 kg.

Photometric



INNO POCKET SPOT Code: 1237000088
INNO POCKET SPOT PEARL Code: 1237000098



ADJ UC-IR Remote included



Code: 1237000090




Product Video

INNO SCAN HP™

- Light Source: 80W High Output White LED Engine, 50,000 Lamp life
- LUX: 5461 @ 2M at 16° beam angle
- Operational modes: DMX, Auto Run, Master/Slave & Sound Active
- DMX channels: 8, or 11; 3 Pin In/Out
- Colors: 8 Colors + Open
- Gobos: 6 Rotating, Interchangeable Gobos + spot, 24mm (20mm viewable; metal)
- Power Draw: 103W Max; .86 Amps @120V, .47 Amps@220V
- Multi-voltage Operation: 100-240V, 50Hz/60Hz (auto sensing)
- Compatible with ADJ UC3 series remotes
- Dimensions (LxWxH): 22.75" x 11" x 8.25" / 578 x 278 x 209mm
- Weight: 16 lbs. / 7.3 kg.

Photometric



INNO ROLL HP™

- Light Source: 80W High Output White LED Engine, 50,000 Lamp life
- LUX: 2000 @ 2M at 10° beam angle
- Operational modes: DMX, Master/Slave & Sound Active
- DMX channels: 8 Channels; 3 Pin In/Out
- Colors: 8 Colors + Open
- Gobos: 6 Rotating, Interchangeable Gobos + spot, 24mm (20mm viewable; metal)
- Power Draw: 103W Max; .86 Amps @120V, .47 Amps@220V
- Multi-voltage Operation: 100-240V, 50Hz/60Hz (auto sensing)
- Compatible with ADJ UC3 series remotes
- Dimensions (LxWxH): 22.75" x 11" x 8.25" / 578 x 278 x 209mm
- Weight: 16 lbs. / 7.3 kg.

Photometric



Product Video



Code: 1237000091



LIGHTNING COB CANNON™

- Super Bright, high output, 100W LED white strobe cannon
- Advanced COB Technology (Chip On Board) produces powerful, high output white light
- 3 Operation modes: Sound Active, Manual, & DMX
- 3 DMX Operation modes: 1, 2 & 3 channel
- 4-button digital display
- Flicker Free operation (No flickering on camera)
- 5 selectable Dim Curves (Standard, Stage, TV, Architectural & Theatre)
- LED pulse and strobe effect
- Electronic Dimming: 0 - 100%
- Beam angle: 33 degrees - Dimensions (LxWxH): 12.75" x 11" x 8" / 320 x 278 x 200mm
- Weight: 11 lbs. / 4.98kgs

Code: 1215200025



Product Video

UV COB CANNON™

- Super high output 100W LED UV light cannon
- Great for performance stages, theatrical productions and special effects productions - requires almost no maintenance - low heat, low power consumption
- Advanced COB Technology (Chip On Board) produces powerful, smooth UV color
- 3 Operation modes: Sound Active, Manual, & DMX
- 3 DMX Channel modes: 1, 2 or 3 channel
- 4-button digital DMX display
- Flicker Free operation (No flickering on camera)
- 5 selectable Dim Curves (Standard, Stage, TV, Architectural & Theatre)
- LED pulse and strobe effect
- Electronic Dimming: 0 - 100%
- Beam angle: 33 degrees

Code: 1224100006



Product Video



Code: 1237000102



Product Video

INNO POCKET SCAN™

- 12-Watt LED DMX Barrel Mirrored Scanner
- Single Gobo/Color wheel: 8 fixed Gobo/Colors + spot/white
- 3 Operational modes: DMX, Sound Active & Internal Show control modes
- 6 DMX channels
- 12 Built-in shows
- Gobo Shake effect
- Gobo scroll mode
- Beam Angle: 14-degrees
- X/Y mirror movement
- Stepper motors with micro stepping
- 5 selectable Dim Curves (Standard, Stage, TV, Architectural & Theatre)
- Shutter: Pulse effect; random strobe slow to fast Inno Pocket Roll
- Dimming: 0% - 100%
- Display Inversion Mode
- LED Source: 12W White LED source (Rated at approximately 50,000 hrs)
- Dimensions (LxWxH): 329 x 132 x 165mm
- Weight: 2.6 kgs.

INNO POCKET ROLL™

- 12-Watt LED DMX Barrel Mirrored Scanner
- Single Gobo/Color wheel: 8 fixed Gobo/Colors + spot/white
- 3 Operational modes: DMX, Sound Active & Internal Show control modes
- 6 DMX channels
- 12 Built-in shows
- Gobo Shake effect | Gobo scroll mode
- Beam Angle: 14-degrees
- X/Y mirror movement
- Stepper motors with micro stepping
- 5 selectable Dim Curves (Standard, Stage, TV, Architectural & Theatre)
- Shutter: Pulse effect; random strobe slow to fast Inno Pocket Roll
- Dimming: 0% - 100%
- Hanging Yoke + safety hook included
- Optional IR wireless remote control: Full On, Stand by, Strobe, Color Change, Dimming, Sound
- LED Source: 12W White LED source (Rated at approximately 50,000 hrs)
- Dimensions (LxWxH): 329 x 132 x 165mm
- Weight: 2.6 kgs.



Product Video



Code: 1237000103

ROTOBEAM 4™

- Specifications:
- 4-head LED Helicopter effect with 360-degree continuous rotation
- Beams rotate and strobe to the sound of music
- 4x 3-watt LEDs (1x Red, 1x Green, 1x Blue & 1x White)
- Run all night - no duty cycle
- ADJ UCR Remote compatible (Sold Separately): Control Stand By (Blackout), Full On, Color Selection, Strobe, Sound, & Dimming
- Auto Program with various color patterns (non user selectable)
- Rotation: Variable
- Includes single yoke to mount on wall or from trussing bracket
- Multi Voltage: AC 100V-240V 50/60Hz (Auto Sensing)
- Power Consumption: 19W
- Dimensions (LxWxH): 223 x 223 x 230mm
- Weight: 3 kg.



Product Video



Code: 1222300020

MONSTER DUO™

- Light Source: 18 x 1W RGBAW (Red, Green, Blue, Amber, White) LEDs
- High output, Dual lens Moonflower effect with 45° Beam Angle
- Exciting multi color built-in programs; Sound Active, Auto Program or DMX
- DMX Modes: 1; 3-Pin DMX In/Out
- IEC AC In/Out (Power daisy chain 127 units @110V, 20 units @220V)
- Power Consumption: 35W
- Dimensions (LXWXH): 10.75" x 10" x 7" / 271 x 251 x 176mm
- Weight: 5 lbs/ 2.2 kg



ADJ UC-IR Remote compatible
(Sold Separately):



Product Video



Code: 1222300018



Code: 1222300017



Product Video

MONSTER QUAD™

- Light Source: 25 x 1W RGBAW (Red, Green, Blue, Amber, White) LEDs
- High output, Quad lens Moonflower effect with 93° Beam Angle
- Exciting multi color built-in programs; Sound Active, Auto Program or DMX
- DMX Modes: 1; 3-Pin DMX In/Out
- IEC AC In/Out (Power daisy chain 6 units @110V, 10 units @220V)
- Power Consumption: 35W
- Dimensions (LXWXH): 18.25" x 11.25" x 6.5" / 460 x 285 x 167mm
- Weight: 8 lbs/ 3.4 kg



ADJ UC-IR Remote compatible
(Sold Separately):

MONSTER BEAM™

- Light Source: 25 x 1W RGBAW (Red, Green, Blue, Amber, White) LEDs
- High output, Wide Beam Moonflower effect with 29° Beam Angle
- Exciting multi color built-in programs; Sound Active, Auto Program or DMX
- DMX Modes: 1; 3-Pin DMX In/Out
- IEC AC In/Out (Power daisy chain 7 units @110V, 12 units @220V)
- Power Consumption: .36 Amps @ 110V; 18 Amps @ 220V
- Dimensions (LXWXH): 12.5" x 10.0" x 8.25" / 213 x 254 x 207mm
- Weight: 8 lbs/ 3.3 kg

Compatible with UC3 Series

UC3 Universal Controller



UC3 Wireless System



UC3 Foot Controller



Product Video



Code: 1226200043



MONSTER FUN™

- Light Source: 25 x 1W RGBAW (Red, Green, Blue, Amber, White) LEDs + white LED strobe strips
- 2-FX-IN-1: high output, Moonflower effect with five lenses + four strobe strips
- Large 60° Beam Angle
- Exciting multi color built-in programs; Sound Active, Auto Program or DMX
- DMX Modes: 1; 3-Pin DMX In/Out
- IEC AC In/Out (Power daisy chain 14 units @110V, 24 units @220V)
- Power Consumption: 50W
- Dimensions (LxWxH): 13.5" x 9.5" x 13.5" / 338 x 241 x 338mm
- Weight: 10 lbs/ 4.7 kg



ADJ UC-IR Remote compatible
(Sold Separately):



Product Video



Code: 1222300019



Code: 1222400085




Product Video

JELLY GLOBE™

- Slow rotating ball that produces 2-FX-IN-1: glowing transparent case + sharp RGB beams of light
- Built-In light shows
- Wide beam spread covers a large area
- Beam angle: 330 degrees
- Rotation: Variable up to 5 RPM
- Light Source: 2 x 3W TRI RGB's LEDs
- Power Draw: 11.1W total (All LED's @ Full On)
- Power Voltage: AC 120V/60Hz or 230V/50Hz
- Dimensions (LxWxH): Total: 5.5" x 5" x 28.5" / 140 x 130 x 723mm; Ball: 5" / 130mm; Cable Length: 19" / 500mm
- Weight: 3 lbs. / 1.1 kg.

LED COLOR TUBE II™

- 40-inch/ 1000mm LED Color Tube with UV-resistant polycarbonate tubing
- 32 Bright RGB TRI LEDs (3-in-1)
- 15 Exciting LED Colors plus White
- Rainbow color effect
- Each unit includes one easy-to-use wireless remote to control: Manual Color Change; Auto Color Change; Flash; Rainbow Effect; Slow to Fast Color Strobing; On/Off
- Includes AC power supply, two wall mounting brackets and base to stand LED Color Tube up vertically
- Long life LEDs (Rated at approximately 30,000 hrs.)
- Light Source: 32 x 0.2W TRI RGB's LEDs
- Power Draw: 6W total (All LED's @ Full On)
- Auto sensing power supply: DC 100V/60Hz - 240V/50Hz
- Dimensions (LxWxH): 40" x 2" x 2" / 1016 x 50 x 50mm
- Weight: 2 lbs. / 1 kgs.

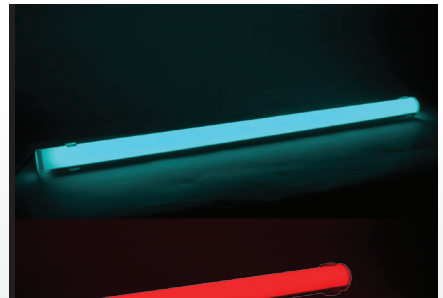


Code: 1211500011

INNO COLOR BEAM Z7™

- 70W LED Moving Head Wash with motorized zoom
- 7x 10W RGBW Quad Color (4-IN-1) Osram LEDs
- Motorized Zoom: 10° ~ 60-degree beam angle
- 64 Built-In Color Macros
- 14 DMX channels | 4 Built-In light shows
- Electronic Dimming: 0% - 100% | Five Dimmer Curve Modes
- Pan/Tilt Inverse Mode for contrasting movement when fixtures are linked together
- Fast Pan Tilt Movement | Pan: 540-degree; Tilt: 200-degree
- 16-Bit Fine Pan/Tilt control
- Electronic Strobe/Pulse effect; random strobe slow to fast
- Dimensions (LxWxH): 262 x 167 x 340mm
- Weight: 7.5 kg

Photometric



Code: 1237000084




Code: 1237000083



INNO COLOR BEAM Z19™

- 190W LED Moving Head Wash with motorized zoom
- 19x 10W RGBW Quad Color (4-IN-1) Osram LEDs
- Motorized Zoom: 10° ~ 60-degree beam angle
- 14 DMX channels | 64 Built-In Color Macros
- Electronic Dimming: 0% - 100% | Five Dimmer Curve Modes
- Pan/Tilt Inverse Mode for contrasting movement when fixtures are linked together
- Fast Pan Tilt Movement | Pan: 540-degree; Tilt: 200-degree | 16-Bit Fine Pan/Tilt control
- 4-Button DMX LCD menu with 180° Inverse View mode
- Electronic Strobe/Pulse effect; random strobe slow to fast
- Long Life LED (Rated at approximately 50,000 hrs)
- Dimensions (LxWxH): 329 x 188 x 395mm
- Weight: 9.2 kg.

Photometric



Code: 1237000089



INNO BEAM LED™

- Light Source: 80W High Output White LED, 50,000 Lamp life
- LUX: 75300 @ 2M at 6° beam angle
- Operational modes: DMX, Auto Run, Master/Slave & Sound Active
- DMX channels: 13 ; 3 Pin In/Out
- Colors: 8 Colors + Open
- Gobos: 4 Fixed Gobos, 4 Beam Reducers + spot
- Features: 8 Facet Rotating Prism, Frost Filter
- Pan: 540 degree, Tilt: 270 degree
- Power Draw: 130W Max; 1.08 Amps @120V, .59 Amps@220V
- Multi-voltage Operation: 100-240V, 50Hz/60Hz (auto sensing)
- Dimensions (LxWxH): 11.5" x 7.5" x 18.25" / 289 x 188 x 461mm
- Weight: 18 lbs. / 8.2 kg.

Photometric





Code: 1237000097




Product Video

VORTEX 1200™

- Light Source: 12 X10W RGBW Quad Color (4-IN-1) LEDs, 50,000 Lamp life
- DMX channels: 14, 15, 17 or 29; 3 Pin In/Out
- 23 Built-In Color Macros; Electronic Dimming: 0% - 100%
- 16-piece lens kit rotates continuous 360 degrees clockwise or counter-clockwise
- Electronic Strobe/Random effect; 23 Built-In Color Macros
- Powercon AC IN/OUT; Daisy Chain up to 4 units @ 120V, 8 units @ 220V
- Power Draw: 174W Max; 1.45 Amps @ 120V, 79 Amps @ 220V
- Multi-voltage Operation: 100-240V, 50Hz/60Hz (auto sensing)
- Compatible with ADJ UC3 series remotes
- Dimensions (LxWxH): 10.5" x 6.75" x 13" / 263 x 170 x 327mm
- Weight: 16 lbs. / 7.3 kg.

Photometric



(Remotes Included)



Product Video

DOTZ TPAR SYSTEM™


Code: 1223200031

- Light Source: 4 X 30W COB Tri RGB LEDs In separate adjustable fixtures
- Portable Wash/ Blinder stage lighting system with stand, travel bag, and foot controller
- Standard 90° or 25° kit included to adjust beam angle; 15 exciting built in programs
- DMX Modes : 3,6,7,12, or 18 channels: 3 PIN DMX In/Out
- 2x power plugs on rear to switch other Effects On/Off by Footcontroller or DMX
- Includes hardware to mount lighting fixtures on top of bar
- IEC AC IN/OUT to daisy chain power
- Multi Voltage operation: AC 100-240V 50/60 Hz (IEC Input)
- Power Consumption: 1.31 Amps @ 110V; .65 Amps @ 220V
- System Dimensions (LXWXH): 39.5" x 12.75" x 3.25" / 1000 x 320 x 82mm
- Weight: 35 lbs / 16kg

SYSTEM INCLUDES:

- 4x COB LED Par Wash Fixtures
- 1x Foot Controller
- 1x Lighting Stand
- 1x ADJ RFC Remote Control
- 1x Stand Bag
- 1x Soft case for lighting system

Photometric




DOTZ PAR™


Code: 1223200032

- Light Source: 1x 30-Watt COB TRI LED (RGB: 3-IN-1, rated at approximately 50,000 hrs)
- 5x Operational modes: Auto, Sound Active, Color Macro, Dimmer, and DMX Controlled Mode
- Standard 90° or 25° kit included to adjust beam angle
- IEC AC IN/OUT to daisy chain power (up to 13 Dotz Par's @ 110V and 28 Dotz Par's @ 230V)
- Power Draw: 36W total (All LEDs @ Full On)
- Auto sensing power supply: AC 100V/60Hz - 240V/50Hz
- Dimensions (LxWxH): 13.5" x 5.75" x 5.75" / 340 x 140 x 140mm
- Weight: 5 lbs. / 2 kgs.

Photometric: Lens Off



Photometric: Lens On



Product Video



Compatible with:
Dotz Par RF remote
(Sold Separately)



Code: 1226100281



Product Video

VBAR PAK™

- Ultra bright, compact black Linear fixture with 5x 4-Watt, 4-IN-1 QUAD LEDs (RGBA) – casts no RGBA shadows
- Smooth RGBA Color Mixing (fast or slow color change operation) | Flicker Free
- Great as an architectural wall wash or for performance stages where traditional stage lighting emit a lot of heat onto performers
- 8 DMX Channel modes: 1, 2, 3, 4, 5, 6, 7 or 8 channels
- 5 Operational modes: RGBA Dimmer mode, sound active mode, static color mode, auto run mode (3 auto run modes), and DMX Control
- Stand Alone or Master/Slave Configuration
- Beam Angle: 40 degrees
- 15 built-in Color Macros
- Electronic Dimming: 0-100%
- VBAR Gig Bag inner dimensions (LxWxH): 560 x 165 x 90mm
- System Weight: 4 kg.
- Dimensions (LxWxH): 560 x 63 x 90mm
- Weight: 1.7 kg.

SYSTEM INCLUDES:

- 2x VBAR LED Linear Fixtures
- 1x ADJ LED RC2 IR
- 1x Soft Case Gig Bag
- Wireless Remotem (LED RC2)

VPAR PAK™

- Ultra bright slim flat black Par with 5x 4-Watt, 4-IN-1 QUAD LEDs (RGBA)
- Smooth RGBA Color Mixing (fast or slow color change operation)
- Unique "sit-flat" design: Power & DMX Ins/Outs intelligently designed so the unit can be set flat on the ground or set inside truss
- Great as an architectural wall wash or for performance stages where traditional stage lighting emit a lot of heat onto performers
- 8 DMX Channel modes: 1, 2, 3, 4, 5, 6, 7 or 8 channels
- 5 Operational modes: RGBA Dimmer mode, sound active mode, static color mode, auto run mode (3 auto run modes), and DMX Control
- Digital DMX Display with 4-button menu for easy navigation
- Stand Alone or Master/Slave Configuration
- Beam Angle: 40 degrees
- 15 built-in Color Macros
- Dimensions (LxWxH): 225 x 220 x 85mm
- Weight: 1.2 kg.
- VPAR Gig Bag inner dimensions (LxWxH): 225 x 200 x 240mm
- System Weight: 3 kg.

SYSTEM INCLUDES:

- 2x VPAR LED Paks
- 1x ADJ LED RC2 IR
- 1x Soft Case Gig Bag
- Wireless Remotem (LED RC2)



Product Video



Code: 1226100280




FLASHBACK 4™

- Light Source: 288 x 10mm RGBA LED (rated at approximately 20,000 hrs)
- Set of two 4-bank lighting fixtures that fold up into a transportable hard case
- 2 Operational modes: Auto Run or Sound Active
- Sound Active Knob adjustment on rear
- 11 Built-In preset programs
- LED pulse/strobe effect and program control on rear
- Beam Angle: 45-degrees
- Power Draw: 23W total (All LEDs @ Full On)
- Horizontal or vertical stand mountable (tripod stands not included)
- Auto sensing power supply: AC 100V/60Hz - 240V/50Hz
- Dimensions (LxWxH): 22.5" x 7.5" x 11" / 568 x 192 x 280mm
- Weight: 16 lbs. / 6.9 kgs.



Product Video

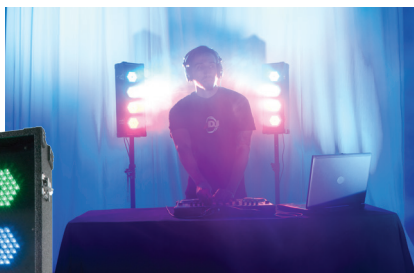

Code: 1226100275

FLAT PAR TW5™

Code: 1226100276

- 25W Dynamic White LED Flat Par
- 5x 5-Watt TRI LED 3-IN-1 CW/WW/A (Cool White/Warm White/Amber - 50,000 hrs.)
- 7 DMX Modes: 1, 2, 3, 4, 5, 6 & 7 channels
- TRI LEDs Eliminate color shadows when mixing Dynamic White LEDs
- LED pulse and strobe effect
- Electronic Dimming: 0 - 100%
- Beam angle: 40-degree
- 4-button, DMX digital display on rear panel
- Optional RF wireless remote control (sold separately)
- Dual yoke allows fixture to be hung or set on the ground
- Data linkable via 3-pin XLR cables
- Power Draw: 26W total (All LED's @ Full On)
- Multi-voltage operation: AC 100-240V, 50/60Hz (IEC power In/Out)
- Dimensions (LxWxH): 10.75" x 8.75" x 4.25" / 272 x 223 x 105mm
- Weight: 6 lbs. / 2.4 kg.

**FLAT PAR TW12™**

Code: 1226100277

- 60W Dynamic White LED Flat Par
- 12x 5-Watt TRI LED 3-IN-1 CW/WW/A (Cool White/Warm White/Amber - 50,000 hrs.)
- 7 DMX Modes: 1, 2, 3, 4, 5, 6 & 7 channels
- TRI LEDs Eliminate color shadows when mixing Dynamic White LEDs
- LED pulse and strobe effect
- Electronic Dimming: 0 - 100%
- Beam angle: 40-degree
- 4-button, DMX digital display on rear panel
- Optional RF wireless remote control (sold separately)
- Dual yoke allows fixture to be hung or set on the ground
- Data linkable via 3-pin XLR cables
- Power Draw: 61W total (All LED's @ Full On)
- Multi-voltage operation: AC 100-240V, 50/60Hz (IEC power In/Out)
- Dimensions (LxWxH): 13" x 11" x 4.25" / 328 x 280 x 105mm
- Weight: 7.5 lbs. / 3.25 kg.

**UV LED BAR 20™**

- Light Source: 20x 1-Watt UV LEDs
- 4 Operational Modes: DMX Controlled / Sound Active / Dimmer / Auto Run
- UV strobe effect
- 3 DMX Channels
- Electronic Dimming: 0 - 100%
- Beam angle: 10 degrees vertical x 40 degrees horizontal linear beam angle
- Power Draw: 30W
- Includes wireless remote: Control On/Off and strobing speed
- Wavelength: 390-410 nanometers
- Multi-voltage Operation: AC 100-240V, 47/63Hz
- Dimensions (LxWxH): 13.25" x 2.5" x 7" / 334x61x175mm
- Weight: 6 lbs. / 2.5 kgs.

UV IR Remote Control
(Included)

Code: 1224100007

ULTRA HEX BAR 6™

- Ultra bright, 23-inch (.5 meter) indoor Linear Bar with 6 x 10W Ultra bright HEX (RGBWA + UV: 6-IN-1) LEDs
- Smooth RGBAW + UV color mixing
- Great as an architectural wall wash or for performance stages where traditional stage lighting emit a lot of heat onto performers
- 5 DMX Channel Modes: 6, 7, 8, 12 or 18 channels
- 6 operational modes: Auto Run, Program Mode, Sound Active, RGBWA + UV Dimmer, Static Color and DMX-512 Mode
- Patent Pending Quick Align (Magnetic)
- Beam Angle: 40 degrees
- Flicker Free operation (No flickering on camera)
- 63 built-in Color Macros
- 5 selectable Dim Curves (Standard, Stage, TV, Architectural & Theatre)
- LED pulse and strobe effect
- 2x8 Character LCD Display
- Electronic Dimming: 0-100%



Code: 1226200244




ULTRA HEX PAR3™

- Light Source: 3x 10-Watt RGBAW + UV LEDs, (Rated at approximately 50,000 hrs.)
- Ultra bright, flat Par 38 wash fixture with 3x Red, Green, Blue, Amber, White & UV LED pixels
- 5 DMX Modes: 6, 7, 8, 11 & 12 channel
- 5 Operational modes: Static Color, Dimmer, Auto Run, Sound Active and DMX Controlled
- Beam angle: 40-degree
- Power Draw: 26W total (All LED's @ Full On)
- Multi-voltage operation: AC 100-240V, 50/60Hz (IEC power In/Out)
- Dimensions (LxWxH): 9" x 8.5" x 4.75" / 224 x 213 x 120mm
- Weight: 5 lbs. / 2.02 kgs

Photometric

	R	G	B	W	A	UV	
Beam Angle 40°	460	128	56	31	20		
	481	128	56	31	21		
	359	106	47	27	17		
	624	174	78	41	26		
	261	70	29	17	9		
	87	21	10.1	6.7	3.8		
	1937	561	251	140	91		



Code: 1226100274



5P HEX™

- Ultra bright, flat wash fixture with 5 x Red, Green, Blue, Amber, White & UV LED pixels
- Smooth RGBAW + UV color mixing
- Great as an architectural wall wash or for performance stages where traditional stage lighting emit a lot of heat onto performers
- Intelligently designed, patent pending power & DMX Ins/Outs sit sideways so the unit can be set flat on the ground or set inside truss
- 4 DMX Modes: 6, 7, 8, & 12 channel
- 5 Operational modes: Static Color Mode, RGBAW + UV Dimmer Mode, Program Mode, Sound Active Mode and DMX Controlled
- 7 Built-In Programs | 63 built-in Color Macros
- Flicker Free operation (No flickering on camera)
- 5 selectable Dim Curves (Standard, Stage, TV, Architectural & Theatre)
- LED pulse and strobe effect
- Electronic Dimming: 0 - 100%
- Beam angle: 30-degree
- Dimensions (LxWxH): 210 x 100 x 220mm
- Weight: 2 kg



Code: 1226100279



WiFLY BATTERY™

- Battery powered wireless DMX transceiver (transmitter/receiver in one)
- Battery Life: Up to 20 hours
- Battery life and WIFLY wireless signal strength indicators on side panel
- Magnetic bottom plate for temporary, quick and easy mounting to metal fixtures or objects
- Compatible with all ADJ WIFLY products
- Transmission distance up to 150m/500 feet (open line of sight)
- One transmitter can send to many receivers using the same radio channel
- Receivers automatically listen for transmitters (no pairing required)
- Supports up to 16 DMX-512 universes
- Dip Switches to select from 16 different radio channels (one DMX universe per channel)
- 3-pin & 5-pin DMX In/Out
- Wireless Frequency: 2.4 GHz DSSS
- Power Supply: DC 9-12V (AC or DC powered)
- Dimensions 148 x 135 x 62mm
- Weight: 0.75 kg.



Code: 1226100278

WiFLY WLC16™

Code: 1322000045

- 512 channel DMX Controller with ADJ's WiFLY Transceiver Wireless DMX on-board
- 16 fixtures, up to 32 channels each & 16 Sliders for manual control of channels
- 30 Banks of 16 programmable scenes
- 6 Programmable chases of 480 scenes
- Auto mode controlled by speed and fade time sliders
- Master blackout function
- Password Protection
- Speed and Fade control
- Tap Sync Speed / Sound trigger override
- Built in microphone for sound triggering
- Power failure memory
- 16 x 2 character backlit digital display
- On-board SD card slot (2GB SD Card is included. Supports up to 4GB max)
- All programmed data is stored onto the SD card.
- Voltage Operation: DC12V 500mA min
- Dimensions (LxWxH): 19" x 6.25" x 2.75" / 482 x 155 x 70mm (19-inch rack mount, 3.5 spaces)
- Weight: 6 lbs. / 2.7 kg.

WiFLY PAR QA5
Code: 1226100257WiFLY PAR QA5 WH
Code: 1226100270

Product Video


WiFLY PAR QA5 / WiFLY PAR QA5 WH™

- Light Source: 5 X 5W Quad RGBA (Red, Green, Blue, Amber) LED
- Lithium Battery powered Par Fixture with built in Wireless DMX Control
- 6.5 Hours of operation at full on; 5 Hour Full Charge time
- 25° Beam Angle; up to 500' range for wireless DMX signal control
- DMX Modes : 1,2,3,4,5,6,7, or 8 channels: 3 PIN DMX In/Out
- AC Power Consumption: .50 Amps @ 110V; .25 Amps @ 220V
- Dimensions (LXWXH): 10.5" x 9.5" x 6.5" / 265 x 240 x 164mm
- Weight: 10 lbs/ 4.2 kg

ADJ REC
(Sold Separately)Compatible With:
WiFLY BATTERY
(Sold Separately)Compatible With:
WiFLY WLC16
(Sold Separately)Compatible With:
WiFLY Transceiver
(Sold Separately)

Photometric

R	2750	704	307	150	95
G	2260	549	247	142	84
B	2740	775	364	188	108
W	2650	709	299	168	92
DCRW	9650	2730	1184	611	384


Beam Angle
25°

WIFLY PAR QA5 IP™

- Light Source: 5x 5-Watt QUAD LEDs
- IP65, Outdoor Rated par fixture
- ADJ's WIFLY wireless DMX built-in.
- 8 Operational modes: Manual Color; Color Change; Color Jumping; Color Dreaming: Auto (Program Run); Sound Active, WIFLY and DMX Controlled
- Beam angle: 40-degrees and 64 built-in Color Macros
- 4-Pin Power AC IN/OUT outlets on rear to daisy chain power (up to 15 units)
- Power Draw: 35W total (All LED's @ Full On)
- Multi-voltage operation: AC 100-240V, 50/60Hz
- Dimensions (LxWxH): 10" x 7.5" x 12" / 250 x 190 x 300mm
- Weight: 10 lbs. / 4.2 kg.

Photometric

R	1071	273	114.7	62.3	40.8
G	1245	304	122.4	68.9	43.5
B	1196	291	121	67.4	44.5
A	556	140	58	32	21
RGBA	3520	990	389	228	136.1



Product Video



Code: 1226100273

PINSPOT LED QUAD DMX™

- 8W Quad (4-in-1) RGBW LED Pinpoint (Rated at approximately 10,000 hours)
- Operational Modes: DMX Controlled / Sound Active / IR Remote / Auto Run Programs
- Beam Angle: 15-Degrees
- Lumens: 740 @ 1M at 15°
- DMX Channel: 6 Channel; DMX Connections: 3-Pin DMX In / Out
- Dimming: Adjustable via IR remote; Shutter / Strobe: Adjustable via IR remote
- ADJ UC3 Remote included
- Power Consumption: 11W Max
- Input Voltage: AC 100V-240V 50/60Hz
- Dimensions: 8" x 4" x 2.75" / 205x98x61mm
- Weight: 1 lbs / 0.4kgs



ADJ UC-IR Remote included

Code: 1212100010

EVENT BAR PRO™

Code: 1232400003

- Light Source: 4 x 10W (10000K) white LED
- Each Pinpoint's colors and movements may be individually controlled via DMX
- 8 Built-in Shows
- Beam angle: 3-degree
- Linkable: DMX via 3-pin XLR cable; Power via IEC daisy-chain power link (Up to 5 Event Bar Pro's @ 120V, up to 8 Event Bar Pro's @ 230V)
- Compatible with American DJ UC3 Series easy-to-use controllers (sold Separately)
- Long Life LEDs (Rated at approximately 50,000 hrs.)
- Power Consumption: 85W (All LED's @ Full On)
- Multi-voltage Operation: AC 100 - 240V, 50/60Hz
- Dimensions (LxWxH): 40.75" x 3.25" x 10.75" / 1033 x 83 x 270mm
- Weight: 29 lbs. / 11 kg.

Compatible with UC3 Series
UC3 Wireless System UC3 Foot Controller

UC3 Universal Controller



Product Video




EZ KLING™

- ART-NET to DMX and Kling-Net to DMX interface
- Allows users to pixel map DMX compatible fixtures through the Kling-Net mapper included in Media Master Express and Media Master Pro (Zeus)
- Ideal for use with Flex Pixel Tape and Pixel controllable DMX fixtures
- One EZ Kling interface will drive up to 600 Flex Pixel RGB pixels and 150 DMX Pixels
- 4-button LCD control menu
- Dimensions: (LxWxH): 5.5" x 5" x 1.75" / 135 x 125 x 41mm
- Weight: 2 lbs. / 0.7 kg.



Code: 1321000070

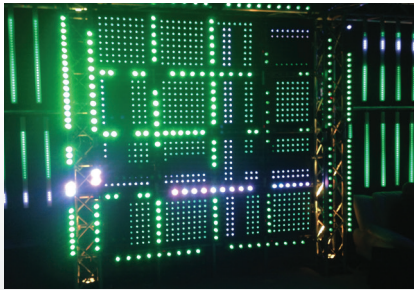

Code: 1222300016




ULTRA KLING BAR18™

- Light Source: 18x 3W Tri LEDs Pixel Bar
- 5 Operational Modes
- 7 DMX Channel Modes
- Built-In Programs & Color Macros
- Electronic Dimming 0-100%
- Kling Net & Art-Net Control via RJ45 In/Out
- Individual Pixel Control
- Power Connection: IEC AC In/out
- Input Voltage: AC 100V-240V 50/60Hz
- Dimensions: 43.5" x 3.25" x 4.5" in. / 1100 X 80 X 116mm
- Weight: 13 lbs / 6 kgs


Photometric

	R	G	B	RGB
1	712	318	161	105
2	696	283	147	85
3	638	291	138	79
4	1780	816	393	239
5				157



FLASH KLING PANEL 64™

- Light Source: 64 x SMD RGB LED's (8x8 Matrix Configuration)
- LED Pixel panel for, low resolution, video displays
- 120-Degree Beam Angle
- Operational Mode: KlingNet and ArtNet compatible. Recommended control solutions: Arkaos Media Master Express, Media Master Pro and LED Master software's (sold separately).
- Link up to 100 Flash Kling Panel 64's
- RJ45 In/Out
- Power Connection: IEC AC In/out
- Power Consumption: 20W (Full On)
- Input Voltage: AC 100V-240V 50/60Hz
- Dimensions: 19.75" x 19.75" x 2.5" in. / 500 X 500 X 63mm
- Weight: 12 lbs / 5.6 kgs



Code: 1226300029



FOG FURY 3000 WiFLY™

Code: 1411100009

- Easy-to-use high output portable fog Machine
- 3 Operational modes: Fog Volume, Fog Duration, & DMX Controlled
- 3 DMX Channel
- ADJ's WiFLY wireless DMX built-in.
- 4-button DMX LCD display on rear panel
- ETS "Electronic Thermo Sensing" to always maintain optimum heat.
- Cut off Circuit to protect pump if fog liquid tank runs dry
- Fluid LED color ready tank indicator
- Heater: 1500W
- Fog Output: 21000 (cu.ft/min) | 594m³/min.
- Warm up time (min): 8
- Tank(liter): 5 L
- Single yoke to mount on a ceiling or from truss
- Power Consumption: 1600W (Full On)
- Voltage Operation: AC 120 or 230V, 50/60Hz
- Dimensions (LxWxH): 18.75" x 13.75" x 12.75" / 475 x 345 x 321mm
- Weight: 25 lbs. / 11.28 kgs



VF400™

Code: 1411100013

- 400W mobile Fog Machine
- High efficiency heater block burns through fog with less residue
- Warm-up time: 5 minutes
- Output: 3,000 cubic ft. per min | 85m³/min.
- Internal fog fluid tank: 0.5 Liter
- Fluid level indicator
- Includes hardwired remote
- Only use high quality, water based fog fluid
- Dimensions (LxWxH): 9.5" x 8" x 5.5" / 240x200x140mm
- Weight: 4 lbs. / 2 kg.

VF1000™

Code: 1411100014

- 1000W mobile Fog Machine
- High efficiency heater block burns through fog with less residue
- Electronic Thermo Sensing (ETS) for optimum heating levels
- Low fog fluid shut off sensor to protect pump
- Warm-up time: 6 minutes
- Output: 8,000 cubic ft. per min | 227m³/min.
- Internal fog fluid tank: 1 Liter
- Fluid level indicator
- Includes remote
- Fog output switch on rear panel
- Only use high quality, water based fog fluid
- Dimensions (LxWxH): 13.5" x 10 x 7.5" / 340x255x190mm
- Weight: 9 lbs. / 4 kg.



**VF1300™**

Code: 1411100015

- 1300W mobile Fog Machine
- High efficiency heater block burns through fog with less residue
- Electronic Thermo Sensing (ETS) for optimum heating levels
- Low fog fluid shut off sensor to protect pump
- Warm-up time: 7 minutes
- Output: 12,000 cubic ft. per min | 340m³/min.
- External fog fluid tank: 2.3 Liter
- Includes remote
- Fog output switch on rear panel
- Only use high quality, water based fog fluid
- Dimensions (LxWxH): 17.5" x 12.5" x 8" / 445x315x200mm
- Weight: 15 lbs. / 7 lbs.

VF1600™

Code: 1411100016

- 1500W mobile DMX Fog Machine
- High efficiency heater block burns through fog with less residue
- Electronic Thermo Sensing (ETS) for optimum heating levels
- Low fog fluid shut off sensor to protect pump; Warm-up time: 8 minutes
- External fog fluid tank: 2.3 Liter; Output: 20,000 cubic ft. per min | 566m³/min.
- Includes wired timer remote control
- Fog output switch & Safety Loop on rear panel
- 3-pin DMX In/Out
- Only use high quality, water based fog fluid
- Dimensions (LxWxH): 19.5" x 14" x 9" / 495x355x230mm
- Weight: 22 lbs. / 10 kg.

**FOG FURY FAZE™**

Code: 1411100010

- 700W portable, high output Faze Machine
- High performance pump for optimum output
- ADJ's Electronic Thermo Sensing (ETS) technology
- Automatic circuit cut-off to protect pump if fog fluid tank runs dry
- Special heating element design that uses an oil type transmission pipeline system to minimize the possibility of clogging
- LED heating indicator system in tank; Low Fluid Indicator on rear
- Warm-up time: 5 min
- External fog fluid tank: 2 Liter; Fog Output: 1,000 (cu.ft./min) | 28m³/min.
- Included Accessory: ADJ FF23TC - 25 ft wired timer remote
- Uses water based fog fluid
- Dimensions (LxWxH): 15" x 10" x 8.5" / 376 x 250 x 212mm
- Weight: 14 lbs. / 6.2 kg.

VF FLURRY™

Code: 1223100002

- 600W mobile Snow Machine
- Spray distance: 2-5 meters
- Volume selection switch: Low or high snow output
- Snow fluid sensor to protect pump
- Internal fog fluid tank: 1 Liter
- Fluid level indicator
- Includes wired remote
- On/Off switch on rear panel
- Uses water based snow fluid
- Dimensions (LxWxH): 13.5" x 10" x 8" / 340x255x200mm
- Weight: 8 lbs. / 3.8 kg.



Fog juice 1 light - 1 Liter™

Code: 1421200023

Fluid for fog machines to create long lasting smoke and fog effects. To use in professional applications like shows, concerts, clubs or theaters.

- Water-glycol based

Fog Juice 1 light: made for making laser and light shows visible



**Light
1 L**

Fog juice 1 medium - 1 Liter™

Code: 1421200024

Fluid for fog machines to create long lasting smoke and fog effects. To use in professional applications like shows, concerts, clubs or theaters.

- Water-glycol based

Fog Juice 1 medium: Standard fog juice for all kind of applications. Most time used in club, disco and party



**Medium
1 L**

Fog juice 1 heavy - 1 Liter™

Code: 1421200025

Fluid for fog machines to create long lasting smoke and fog effects. To use in professional applications like shows, concerts, clubs or theaters.

- Water-glycol based

Fog Juice 1 heavy: Long lasting, intense juice for white plum of fog. Made for show effects or for long lasting effects.



**Heavy
1 L**

F4 PAR BAG™

Code: 1521000190

- Durable padded Gig Bag for transporting lighting, cables, clamps etc.
- Fits up to 4 Slim LED Pars
- Padded dividers may be removed to fit other effect lighting, cables, clamps, etc. (see case dimensions)
- Front pockets fit cables and/or controllers
- Inner Bag Dimensions (LxWxH): 14" x 10" x 9.25" / 360x250x220mm



F8 PAR BAG™

Code: 1521000191

- Durable padded Gig Bag for transporting lighting, cables, clamps etc.
- Fits up to 8 Slim LED Pars
- Padded dividers may be removed to fit other effect lighting, cables, clamps, etc. (see case dimensions)
- Front pockets fit cables and/or controllers
- Inner Bag Dimensions (LxWxH): 29" x 10" x 9.25" / 735x250x220mm



TOURING CASE 4X INNO COLOR BEAM Z19™


- Solid 6,5mm thick plywood
- Strong aluminum profiles
- Duty handles
- Steel ball corners
- 4 wheels for easy transportation
- 2 Butterfly locks
- Color Black
- Measurements: LxWxH 765mm x 615mm x 470mm
- Height with wheels 590mm
- Storage for cables WxH 470mm x 85mm



Code: 1521000221

TOURING CASE 2X INNO SPOT ELITE™

- Solid 6,5mm thick plywood
- Strong aluminum profiles
- Duty handles
- Steel ball corners
- 4 wheels for easy transportation
- 2 Butterfly locks
- Color Black
- Measurements: LxWxH 685mm x 570mm x 425mm
- Height with wheels 690mm

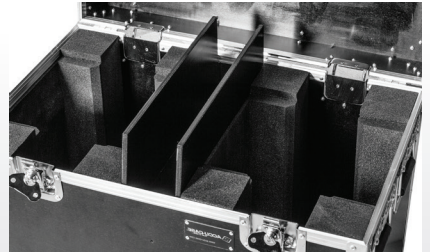

Code: 1521000222

TOURING CASE 4X MATRIX BEAM™

- Solid 6,5mm thick plywood
- Strong aluminum profiles
- Duty handles
- Steel ball corners
- 4 wheels for easy transportation
- 2 Butterfly locks
- Color Black
- Measurements: LxWxH 645mm x 600mm x 65mm
- with wheels H 770mm



Code: 1521000223

TOURING CASE 4X INNO SPOT PRO™

- Solid 6,5mm thick plywood
- Strong aluminum profiles
- Duty handles
- Steel ball corners
- 4 wheels for easy transportation
- 2 Butterfly locks
- Color Black
- Measurements: LxWxH 805mm x 460mm x 500mm
- Height with wheels 620mm



Code: 1521000224

INNO SPOT SERIES



www.adj.eu



Follow Us On:



twitter.com/americandj_eu
facebook.com/ADJEurope
youtube.com/adjlighting

AMERICAN AUDIO®

ACCUCABLE™
EXTEND YOUR WORLD...

ACCUCASE™
PLAY IT SAFE...

www.adj.com - Los Angeles, USA • Miami, USA • Kerkrade, Netherlands • Guangzhou, China
www.adj.eu - ADJ Supply Europe B.V. • Junostraat 2 • 6468 EW Kerkrade • The Netherlands